

# POS Monitor

# PT6000 series 2<sup>nd</sup> Display



## Features:

- 8" TFT LCD display
- Rimless front bezel design, spill & dust proof, meets IP54 requirement
- Integrated protection glass
- Small footprint
- User friendly OSD control buttons
- Sleek surface throughout monitor's appearance
- Low power consumption only 6W with LED backlight


## Specification

### PT6000 series 2<sup>nd</sup> Display - 8" LCD Display

Cabinet Color	Black
Cover Lens	Mitsubishi PMMA Hardness > 5H(JIS D0202), T > 93%
Display	8" Diagonal TFT active matrix with LED backlight
Recommended Resolution	800 x 600
Brightness	250 cd/m2
Contrast Ratio	500 :1 (typ.)
Viewing Angel	125° (H)/140° (V)
I/O Connectivity	VGA/USB
Backlight MTBF	20,000 hrs
Power consumption	< 6W
Power Supply	Wall mount type power adapter Input: 100~240AC 0.5A, Output: 12Vdc 1.5A
Operating Temperature	0°C~40°C
Storage Temperature	-10°C~50°C
Approvals	CE, FCC, BSMI
Wall Mount	VESA 75*75mm

Specifications subject to change without notice.

Unit: mm

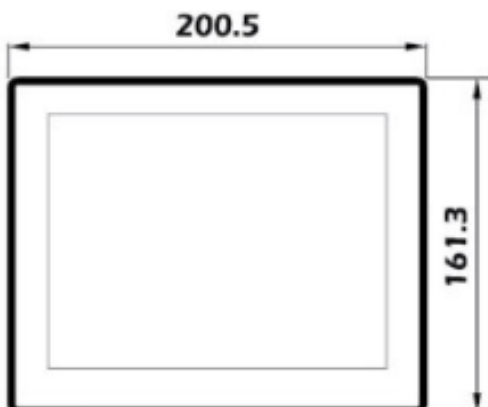

## Optional VESA Stand

